

ABB MEASUREMENT & ANALYTICS

Wi-Fi® Antenna kit installation guide



Secure and easy wireless access for configuration.

Measurement made easy

Introduction

This document will define the procedures and list the parts required to install a Wi-Fi antenna.

i

IMPORTANT NOTE: To enable and configure Wi-Fi for secure access, refer to the XSeries^{G5} XFC or XRC user manuals.

Additional information

Additional free publications are available for download at:
www.abb.com/totalflow.

Related documents	Document number
XSeries ^{G5} XFC/XRC quick start guide	2106124
XSeries ^{G5} XRC user manual	2106000
XSeries ^{G5} XFC user manual	2105999
XSeries ^{G5} board replacement kit guide	2106079

Cyber security

This product is designed to be connected, and communicate information and data, via a network interface, which should be connected to a secure network. It is the customer's sole responsibility to provide and continuously ensure a secure connection between the product and the customer network or any other network (as the case may be). The customer shall establish and maintain appropriate measures (such as, but not limited to, the installation of firewalls, application of authentication measures, encryption of data, installation of antivirus programs, etc.) to protect this product, the network, its system and interfaces against any kind of security breaches, unauthorized access, interference, intrusion, leakage and/or theft of data or information. ABB Inc. and its affiliates are not liable for damages and/or losses related to such security breaches, any unauthorized access, interference, intrusion, leakage and/or theft of data or information.

Although ABB provides functionality testing on the products and updates that it releases, the customer should institute its own testing program for any product updates or other major system updates (to include, but not limited to, code changes, configuration file changes, third party software updates or patches, hardware change out, etc.) to ensure that the security measures that the customer has implemented have not been compromised and that system functionality in the customer's environment is as expected.



IMPORTANT NOTE: Enable the highest security settings on Wi-Fi, Bluetooth, or wired networks to prevent unauthorized wireless access to the device. Use unique passwords and change them periodically.

Safety

Observe warning signs on packaging and on the devices, prior to software configuration.

Safety symbol conventions

The following conventions are used throughout this document to bring attention to important information:

"NOTICE" hazards are associated with equipment or property damage, it must be understood that under certain operating conditions, operating damaged equipment can result in degraded system / process performance leading to serious or life-threatening injuries. Therefore, compliance with all "NOTICE" hazards is required at all times.



WARNING – Bodily injury: This symbol and with the signal word "WARNING", indicates a potentially dangerous situation. Failure to observe this safety information will result in death or severe injury. The text may state the hazard, how to avoid the hazard, and the result if not followed. The bolt is for electrical warnings; the exclamation point is for general warnings.



IMPORTANT NOTE: This symbol indicates operator tips, particularly useful information, or important information about the product or its further uses.

Potential safety hazards



WARNING – Bodily injury: Make sure no explosive atmosphere is present before connecting or disconnecting any connector or performing maintenance on this unit.




WARNING – Bodily injury: to prevent RF exposure and damage to equipment remove all power sources before installing the Antenna Kit.

1 Overview

The photo below shows the Wi-Fi antenna kit parts.

Figure 1: Wi-Fi antenna kit parts

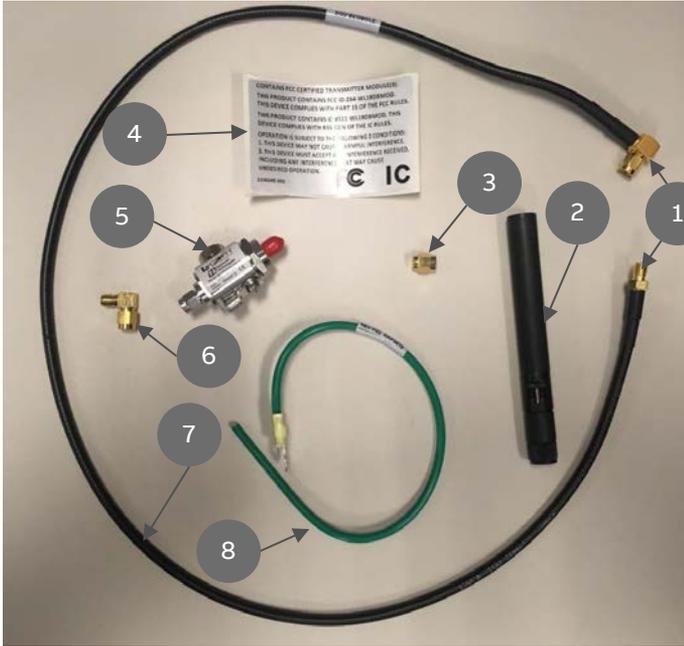

Part number 2106049 kit contents

Photo #	Name	Photo #	Name
1	SMA Fittings	5	Surge protector
2	Antenna	6	SMA plug-to-jack adapter
3	Terminator plug	7	Cable assembly
4	FCC IC tag	8	Ground cable

Cable assembly part numbers for enclosures

Kit number	Cable length	Enclosures
2106049 001	24 inches	6410
2106049 002	32 inches	6413, 6713
2106049 003	44 inches	6890



IMPORTANT NOTE: The cable used in the following procedure is included in the kit. Specify by number the required length when ordering the kit.

2 Installation procedures

1. Locate the cable clamp on the upper right corner of the board. Put the straight end of the cable assembly through the cable clamp.

Figure 2: Cable clamp



2. Attach the right angle SMA fitting of the cable to the board ANT-1, connector (J42).

Figure 3: Attach at ANT 1



3. Attach the plug-to-jack adapter to the straight SMA fitting of the cable.
4. Attach the surge protector to the plug-to-jack adapter.

Figure 4: Attach the straight SMA fitting



Figure 5: Attach the surge protector



5. Cut the ground cable to length. Strip $\frac{3}{8}$ inch of insulation from the free end.



IMPORTANT NOTE: The ground cable is attached to the ground post located near the enclosure's door. Allow enough length for a service loop of approximately 1 inch from the surge protector to the ground post.

6. Remove the crimp ring terminal from the surge protector. (See number 1 in the following photo).

Figure 6: Crimp ring terminal



7. Crimp the surge protector terminal ring to the ground cable.
8. Re-attach the crimped terminal with ground cable to the surge protector.
9. Attach the cable to the surge protector (see below).

Figure 7: Attach the cable



10. Remove the split washer and hex nut from the surge protector.

11. Identify the enclosure used and the location of the antenna hole.



IMPORTANT NOTE: The 8 AH, 13 AH, 16 AH, and 26 AH batteries fit in the 6410 enclosure with the antenna surge protector installed.

Enclosure number	Antenna hole location	Photo of enclosure
6410	On the Left side of the enclosure, in the upper left corner.	 A photograph of a white metal enclosure. A white rectangular box highlights a red and black antenna hole in the upper left corner of the front panel.
6413	On the bottom of the enclosure, in the back left corner	 A photograph of the back of a white metal enclosure. A red rectangular box highlights a red and black antenna hole located at the bottom left corner.
6890	2 holes are on the bottom left of enclosure, both are usable	 A photograph of a white metal enclosure. A white rectangular box highlights two antenna holes on the bottom left side of the front panel.

Enclosure number	Antenna hole location	Photo of enclosure
------------------	-----------------------	--------------------

6713

2 holes are on the bottom of the enclosure in the back left corner. There is a 3rd hole of same size in the Back Right Corner. The Cable assembly is not long enough to reach that hole.



12. Remove the black protective plug from the antenna hole in the enclosure.
13. Install the assembled surge protector into the hole (see below).

Figure 8: Install surge protector



14. Secure the surge protector to the enclosure with the provided split washer and hex nut.

View of the installed surge protector from the inside of the enclosure (see below). Enclosure 6413 shown.

Figure 9: Inside the enclosure



15. Attach the ground cable to the ground post (see number 2 in the picture below).
16. Route the cable assembly via mountable cable ties attached to the enclosure (see number 1, below).

Figure 10: Cable assembly



Photo number	Name
1	Mountable cable ties
2	Ground cable
3	Enclosure ground post

17. Attach the FCC transmission compliance tag to the outside of the enclosure (see below).

Figure 11: FCC compliance tag



18. Remove the red protective cap from the surge protector.
19. Attach the antenna to the surge protector. Keep the Antenna in the straight position (see below).

Figure 12: Straight antenna



20. Attach the terminator plug to the board ANT-2, connector (J43). (see number 1, below).

Figure 13: ANT-2 terminator plug



The Wi-Fi antenna installation is complete.

This page is intentionally blank.



ABB Inc.

Measurement & Analytics

Quotes: totalflow.inquiry@us.abb.com

Orders: totalflow.order@us.abb.com

Training: totalflow.training@us.abb.com

Support: upstream.support@us.abb.com

+1 800 442 3097 (opt. 2)

www.abb.com/upstream

Main Office -
Bartlesville
7051 Industrial Blvd
Bartlesville, OK 74006
Ph: +1 918 338 4888

Kansas Office - Liberal
2705 Centennial Blvd
Liberal, KS 67901
Ph: +1 620 626 4350

Texas Office – Odessa
8007 East Business 20
Odessa, TX 79765
Ph: +1 432 272 1173

Texas Office - Houston
3700 W. Sam Houston
Parkway S., Suite 600
Houston, TX 77042
Ph: +1 713 587 8000

California Office -
Bakersfield
4300 Stine Road
Suite 405-407
Bakersfield, CA 93313
Ph: +1 661 833 2030

Texas Office –
Pleasanton
150 Eagle Ford Road
Pleasanton, TX 78064
Ph: +1 830 569 8062

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents - in whole or in parts – is forbidden without prior written consent of ABB.

Bluetooth® is a registered trademark of the Bluetooth Special Interest Group.

Wi-Fi® is a registered trademark of the Wi-Fi Alliance.

2106123MNAA

Copyright© 2018 ABB all rights reserved