

ABB INDUSTRIAL DRIVES

ABB DC power supplies

DCS880, 20 A to 5200 A / 10400 A



Simplifying your world without limiting your possibilities!

Thyristor DC converters

With the DC power supplies ABB offers its customers thyristor based controllers for precise current and voltage control of electrolysis processes like hydrogen generation (power to gas), water treatment and many more.

Benefits

- Ideal to control electrolysis processes
- Suitable for electrolysis technologies for chlorine
- Suitable for electrolysis technologies for hydrogen including
 - PEM
 - Alkaline
 - etc.
- 300 V_{AC} to 1200 V_{AC}
- 500 V_{DC} up to 1500 V_{DC}
- up to 5200 A_{DC} / 10400 A_{DC} in 12 pulse configuration
- controllable DC voltage and DC current using thyristors / SCR's
- large variety of supervision and protective functions could be implemented
 - overcurrent
 - overvoltage
 - temperature supervision
 - current slope
 - etc.
- user-friendly and flexible
- customized solutions in terms of
 - optimized reactive power
 - harmonics (THDi)
 - DC current ripple



Adaptive programming

Adaptive programming is ideal for creating simple control programs for various applications. It does not require expertise in programming and is offered as a standard in all-compatible drives.



Removable memory unit

Stores all the firmware and parameter configurations in an easily replaceable and simple-to-install module.



All typical DC configurations

DCS880 standard firmware supports all standard configurations present in DC drive applications such as 6-pulse, 12-pulse parallel, serial and serial sequential, 24-pulse, M3, M6 and field reversal.



Remote monitoring

With a built-in web server, NETA-21 makes world-wide access easy for industry applications.




Drive-to-drive link (D2D)

Allows fast communication between drives including master-follower configurations as standard.



Selection of supply voltage

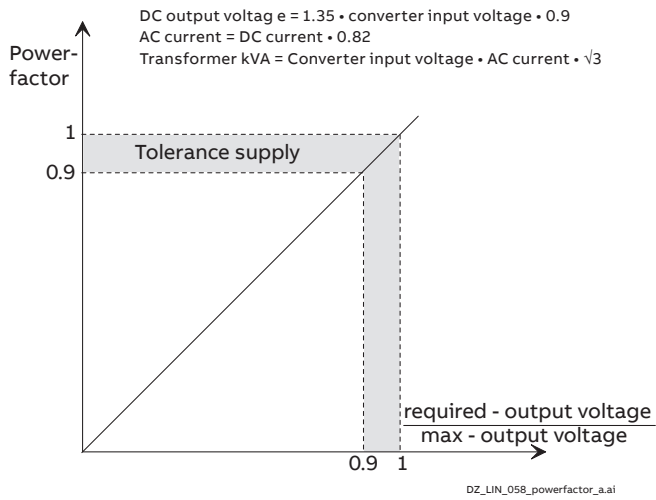

Engineering support

- Harmonics can be reduced by appropriate selection of supply transformer (i.e. 12-, 18- and 24-pulse configuration).

	5th	7th	11th	13th	THD_cur
6-pulse	21 %	14 %	9 %	7 %	36 %
12-pulse	1 %	1 %	6 %	7 %	11 %

- DC current ripple depends on load current, supply voltage, DC choke and configuration (6-pulse, 12-pulse etc.)
 i.e. 6-pulse, 400 V, 4000 A, 0.6 mH, 10 % current ripple
 12-pulse, 400 V, 4000 A, 0.15 mH, 10 % current ripple
- Power factor is dependent on dimensioning of supply transformer and converter supply voltage in relation to DC output voltage.



Intuitive human-machine interface

User-friendly, high-contrast and high-resolution display enabling easy navigation in multiple languages. Allows USB and Bluetooth connection.



Startup and maintenance tool

Drive composer PC tool for drive startup, configuration and daily use and process tuning. PC tool is connected to the drive via Ethernet or USB interface.



Communication with all major automation networks

Fieldbus adapters enable connectivity with all major automation networks.



Flexible product configurations

Drives are built to order with a wide range of options. Ready made cabinets with or without transformer are available up to 20 MW.




Extended connectivity

In addition to the standard interfaces, the drive has three built-in slots for additional input/output extension modules and speed feedback interfaces.

ABB DC converter

Overview

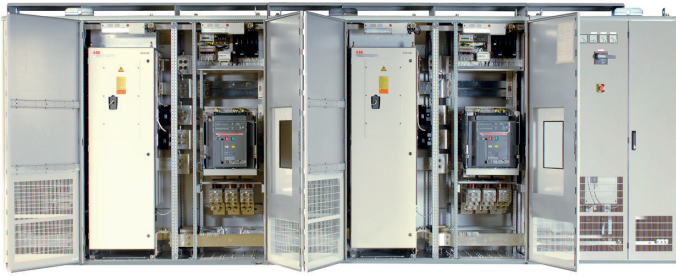


- cabinet solutions individually adaptable to customer requirements (cable connection, color, protection class, etc.)
- protection of stacks can be realized by programming features of DCS880
- user-defined accessories like separate connection to PLC or automation systems via fieldbus available
- transformer and/or T-reactor/ DC choke can be included
- wide range of switches and protection devices available
- good cos phi / low harmonics (THDi) in 12-pulse configuration


Ratings, types and voltages

Unit size	2-Q rated Current DCS880-S01 I_{DC} [A]	Supply voltage [V _{AC}]						
		400	500/525	600	690	800	990	1190
H3	290			•				
	315	•	•					
	405	•	•					
	470	•	•					
H4	590			•				
	610	•	•					
	740	•	•					
	900	•	•					
H6	900			•	•			
	1200	•	•					
	1500	•	•	•	•			
	2000	•	•	•	•			
H7	1900						•	
	2050		•	•	•			
	2500	•	•	•	•	•		
	3000	•	•	•	•	•		
H8	2050							•
	2600							•
	3300	•	•	•	•	•	•	•
	4000	•	•	•	•	•	•	•
	4800			•	•	•		
	5200	•	•					


Configurations

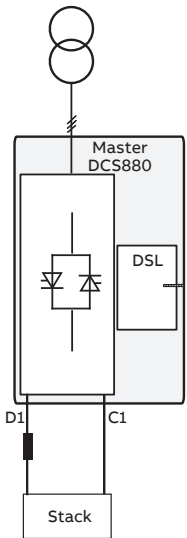

6-pulse
(i.e. 500 V / 5,000 A)

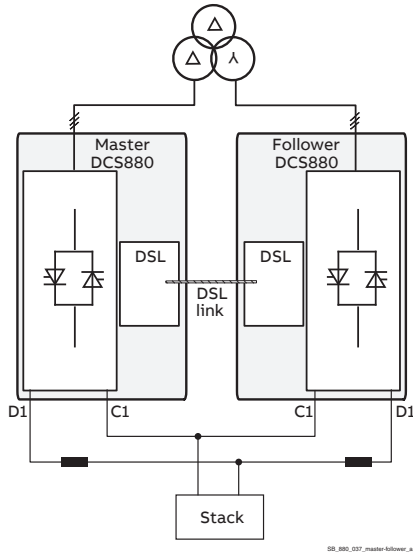

12-pulse parallel
(i.e. 500 V / 10,000 A)

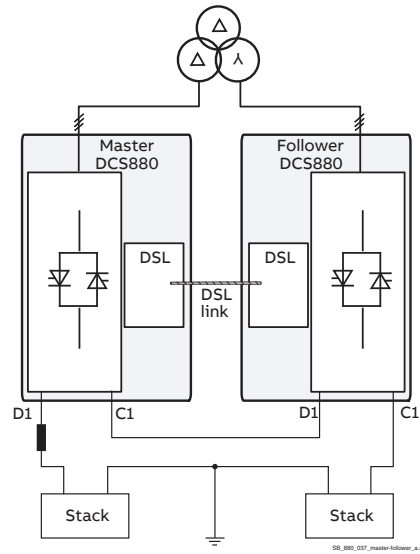

12-pulse serial
(i.e. 1,000 V / 5,000 A)